

Reverse Osmosis Watermakers



Minimar Plus

Minimar Plus is a fully automatic, compact, light and low energy consumption -4.5 Amps- Reverse Osmosis watermaker for sailing and motorboats.

Minimar Plus can also be powered by photovoltaic panels, eolic generator and batteries, with inverter. Standard automatic pressure regulation and low noise operation.

The electronic control panel allows the simple control of all functions. One-touch operation. The watermaker can also work in manual mode. Possibility to start the automatic membranes flushing cycle when the watermaker stops (optional).

Light and resistant high pressure vessels made in carbon fibre, certificated by TÜV.

Mounted in a stainless steel frame, is also available as Slim configuration -with separate components-, to be easily fit in tight spaces.



MINIMAR PLUS 600

Remote controls available: LCD panel, by on board PC, by 4.3" LCD touch-screen display and also by GSM or SAT link.

For the complete list of available accessories see the pages 16 and 17 of this catalog.

MINIMAR PLUS 600 SLIM



optional:
GSM & **SAT**
LINK

Technical Data


Model	Production per hour (litres / gallons)	Production per day (litres / gallons)	Voltage (Volt) / Frequency (Hz) Current drain (Amps)	Max dimensions -L x W x H- (mm)	Weight (kg)
MINIMAR PLUS 200	35 / 9.2	840 / 220	230 V AC - 50 Hz single-phase* - 4.5 A	685 x 420 x 280	34
MINIMAR PLUS 400	70 / 18.5	1,680 / 444	230 V AC - 50 Hz single-phase* - 4.5 A	685 x 420 x 280	39
MINIMAR PLUS 600	100 / 26.4	2,400 / 633	230 V AC - 50 Hz single-phase* - 4.5 A	685 x 420 x 280	45

* other voltages and frequencies available on demand


Model	Production by hour (litres / gallons)	Production by day (litres / gallons)	Voltage (Volt) / Frequency (Hz) Current drain (Amps)	Membranes Assy Dimensions -L x W x H- (mm)	Weight (kg)
MINIMAR PLUS 200 SLIM	35 / 9.2	840 / 220	230 V AC - 50 Hz single-phase* - 4.5 A	A: 170 B: 670 C: 95	30
MINIMAR PLUS 400 SLIM	70 / 18.5	1,680 / 444	230 V AC - 50 Hz single-phase* - 4.5 A	A: 230 B: 670 C: 95	35
MINIMAR PLUS 600 SLIM	100 / 26.4	2,400 / 633	230 V AC - 50 Hz single-phase* - 4.5 A	A: 330 B: 670 C: 95	41

* other voltages and frequencies available on demand

Slim Configuration

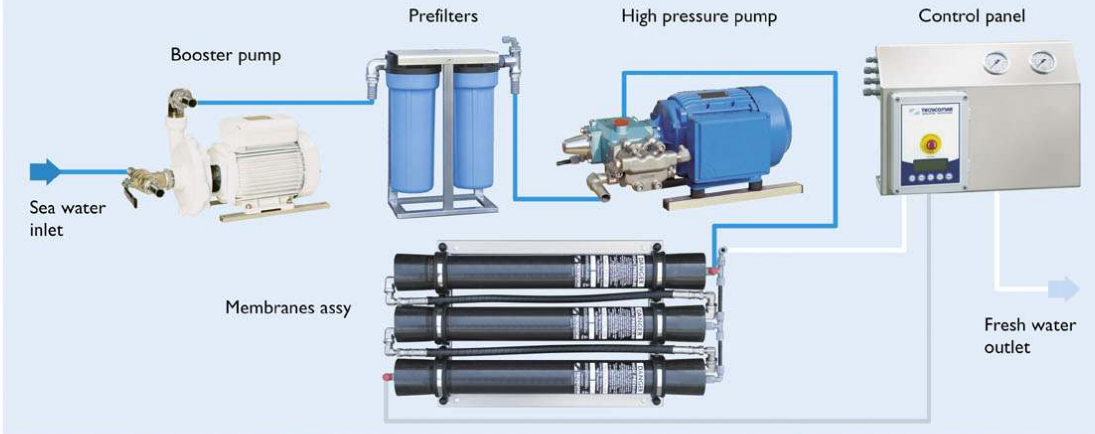

Minimar Plus

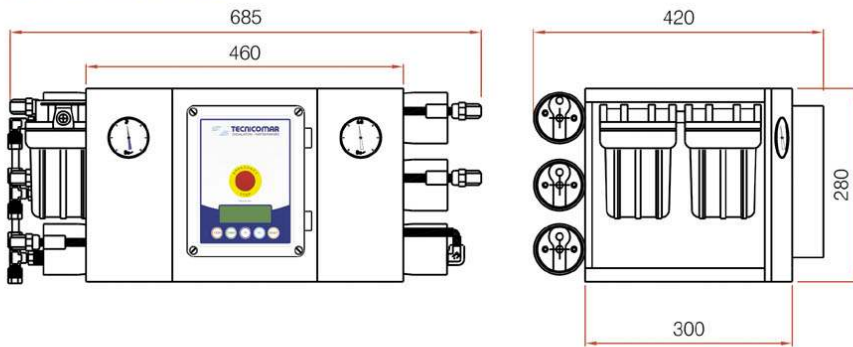

NEW!

EASY USE: FULLY AUTOMATIC
LOW NOISE OPERATION
ONE-TOUCH TECHNOLOGY



Minimar Plus Slim

